


PRODUCT SPECIFICATION SHEET



Rev. C2

LPV2 LED Downlight

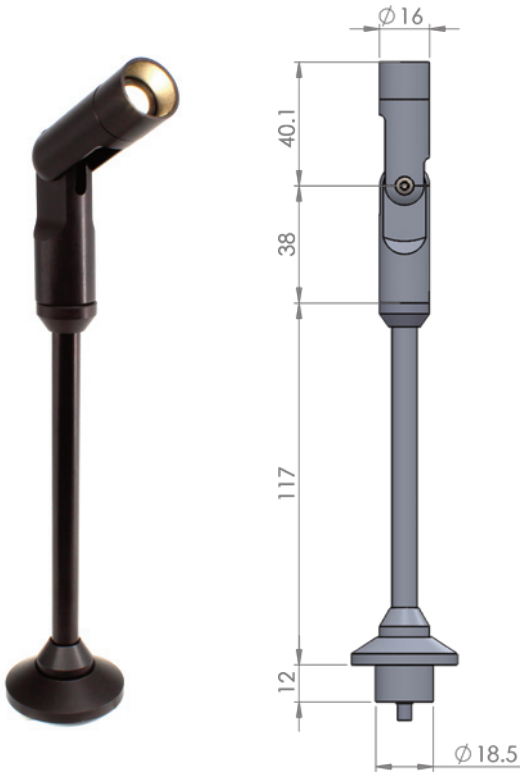

Surface mount LED downlight fitting with stalk. Features free rotation and tilt. Stalk can be configured as 20mm length as standard and we can also supply custom lengths if required.

The UFO LPV2 fitting features a sleek design and 360° rotation with 90° + 45° articulation in the pivot. Available in a choice of colour temperatures with high colour rendition and a selection of optics, the fitting can be used to provide contemporary, functional lighting in any environment. The fitting has an inbuilt plug/socket and can be easily removed from its stalk.

TECHNICAL INFORMATION

| | |
|---------------------|--|
| Colour Temperatures | 2700K, 3000K, 4000K |
| Typical CRI Values | >96CRI (3000K) >95CRI (2700K & 4000K) |
| Power Consumption | 1.6W per fitting |
| Voltage | 3.2V nominal @ 500mA |
| Lumens per Watt | 2700K: 75lm/W - 3000K: 77lm/W 4000K: 80lm/W |
| Lens Options | 16° / 23° / 36° / 61° |
| Material | Aluminium |
| Finishes | Black or silver |
| Articulation | Tilt: 90° + 45° / Rotation: 360° |

DRIVER CONTROL OPTIONS (Depending on specified driver)

| | |
|---------------|------------------------------|
| No Dimming | Local Potentiometer Dimming |
| 0-10V Dimming | Remote Potentiometer Dimming |

PRODUCT ORDERING CODES

| MODEL | OPTICS | COLOUR TEMP | FLANGE COLOUR | LENGTH |
|----------|--------|-------------|---------------|-----------|
| UFO LPV2 | 16° 16 | 2700K 27 | Black BL | 20cm 20 |
| | 23° 23 | 3000K 30 | Silver SV | Custom CU |
| | 36° 36 | 4000K 40 | | |
| | 61° 61 | | | |

UFO LPV2

e.g. UFO LPV2-16-30-BL-20



Universal Fibre Optics Ltd
Home Place \ Coldstream
TD12 4DT \ UK
+44 (0)1890 883416 \ www.ufo.lighting

Universal Fiber Optic Lighting USA, LLC
1749 Northgate Blvd
Sarasota \ FL34234 \ USA
941-343-8115 \ www.fiberopticlighing.com

UFO Licht GmbH
Andreasstraße 20
93059 Regensburg \ Deutschland
+49 (0)9491 955880 \ www.ufo-licht.de